

XT6

M.2 SSD Enclosure

OSCOO®
connect digital world!



HIGH SPEED



Aluminium alloy



Type-C

Transmission Speed



OSCOO XT6 M.2 Enclosure

with a transmission speed of up to 40Gbps, which can meet your needs for processing large files and data backup.

Low power consumption, good heat dissipation, shock resistance allow you to achieve excellent stability and high efficiency in long term use.

Whether on a computer, mobile phone or other devices, it can provide you with excellent performance and reliability, allow you to store, backup and transfer data anytime and anywhere.



Sequential read speed
up to **3600MB/s**

Sequential write speed
up to **2900MB/s**




* Performance may differ depending of the use,
flash configuration, platform and devices used for testing.

Front



Back

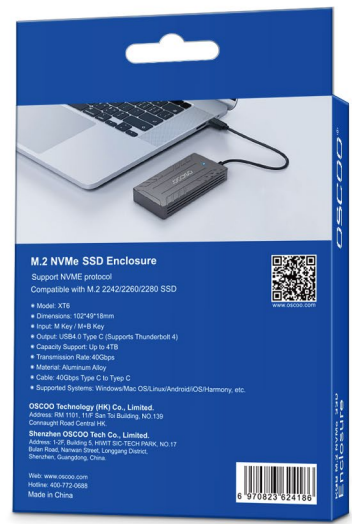

Retail package with built-in hooks

The product is elegantly highlighted to attract the customer's attention at the point of sale

Product Specifications:

Model Name	XT6
Support	NVMe Protocol
Output	USB4.0 Type C (Supports Thunderbolt 4)
Input	M + Key / M+B Key
Compatible	M.2 2242/2260/2280 SSD
Capacity Support	Up to 4TB
Transmission Rate	40Gbps
Color	Gray
Material	Aluminum Alloy
Cable	40Gbps Type C to Type C
Supported System	Windows/Mac OS/Linux/Android/iOS/Harmony, etc.



	Read (MB/s)	Write (MB/s)
SEQ1M Q8T1	3537.34	2856.44
SEQ1M Q1T1	2133.07	2675.07
RND4K Q32T16	647.75	642.37
RND4K Q1T1	49.65	245.08

	Read [MB/s]	Write [MB/s]
SEQ1M Q8T1	3574.03	2970.61
SEQ1M Q1T1	1960.61	1499.48
RND4K Q32T16	931.85	881.16
RND4K Q1T1	32.28	90.45

	Read (MB/s)	Write (MB/s)
SEQ1M Q8T1	3596.36	2539.36
SEQ128K Q32T1	3822.90	2561.53
RND4K Q32T16	1226.79	1284.12
RND4K Q1T1	45.60	138.99